




Brings you the best in Retail Technology


ECD 2300 VFD

Customer Display

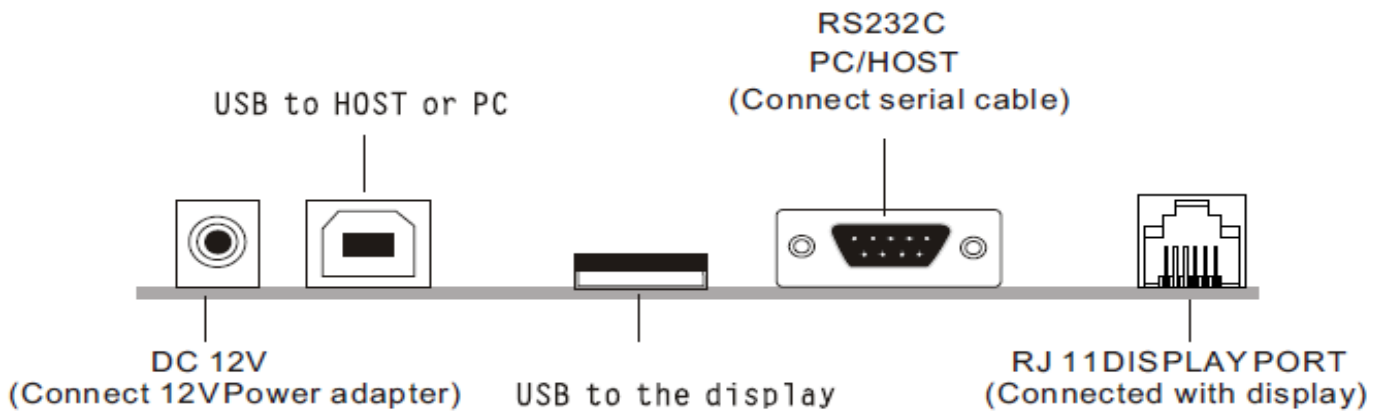


Specifications

Model	ECD-2300	
Display method	Vacuum fluorescent display	
Number of character	40 characters (20 columns x 2 lines)	
Interfaces	USB Port / Rs232Port	
Brightness	>700 cd/m2	
Character type	96 ASCII, Alphanumeric	
Character font	5 x 7 dot matrix	
Power supply	12VDC	
Power consumption	< 6W	
Power on time	25000 hours	
Commands	EPSON, Norriake, futaba, PL-200, UTC Standard, UTC ENHANCE, AEDEX, ADM787, DSP800, CD5220(PTC), EMAX, LOGIC, POS7300	
Dimension	Height	17mm,30mm,42mm,54mm adjustable
	Panel	225 (W) x 92 (H) x 62 (D) mm
	Support	171 mm, 171+120 mm, 171+120+120 mm
	Base	220 (L) x 110 (W) x 72 (H) mm
Viewing angle	8 - 35 degrees	
Rotation angle	Maximum 270 degrees	
Weight	1.08 Kg	
Environmental Condition	Operating temperature : -10 - 55 C Storage temperature : -20 - 65 C Humidity : 30% - 85%	
Applicable standards	FCC class A ” CE	



Bases



Poles



User's Manual/Warranty Card



Display



Serial cable



USB cable



12V Poweradapter



AC Cable



SAM4S

Honeywell

MAGTEK

AccuBANKER
because your money counts



Staff on time

GODEX



Bur Dubai Office

Al Esbij Road off Khaleed Bin Waleed Street,
Bur Dubai PO Box 44960, Dubai, UAE
Tel: +971 4 352 3288 Fax: +971 4 351 3396
Website: www.eposintl.com

Jebel Ali Office

Plot No. S10119 South Zone, Gate No. 7
Jebel Ali Free Zone (JAFZA), Dubai, UAE
Tel: +971 4 886 2980 Fax: +971 4 886 2971
Email: sales@eposintl.com

